



V7 PLUS END MILLS

PLAIN SHANK

GMG18 SERIES

FLAT SHANK


GMG19 SERIES

CARBIDE, 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

● **VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS EXTRA LANG**
 ○ **CARBURE, 6 DENTS, SÉRIE EXTRA-LONGUE, RAYONNÉE**
 ■ **MD, 6 TAGLIENTI SERIE EXTRA LUNGA TORICA**

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

- ▶ Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochoidales Fräsen.
- ▶ Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRC

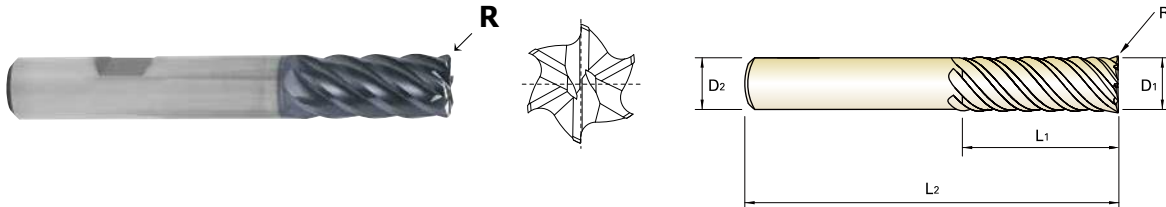

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT		D1	D2	L1	L2
GMG18060	GMG19060	R0.5	6.0	6	24	75
GMG18901	GMG19901	R1.0	6.0	6	24	75
GMG18080	GMG19080	R0.5	8.0	8	32	75
GMG18902	GMG19902	R1.0	8.0	8	32	75
GMG18903	GMG19903	R2.0	8.0	8	32	75
GMG18100	GMG19100	R0.5	10.0	10	40	100
GMG18904	GMG19904	R1.0	10.0	10	40	100
GMG18905	GMG19905	R1.5	10.0	10	40	100
GMG18906	GMG19906	R2.0	10.0	10	40	100
GMG18120	GMG19120	R0.5	12.0	12	48	120
GMG18907	GMG19907	R1.0	12.0	12	48	120
GMG18908	GMG19908	R1.5	12.0	12	48	120
GMG18909	GMG19909	R2.0	12.0	12	48	120
GMG18910	GMG19910	R3.0	12.0	12	48	120
GMG18160	GMG19160	R1.0	16.0	16	64	140
GMG18911	GMG19911	R1.5	16.0	16	64	140
GMG18912	GMG19912	R2.0	16.0	16	64	140
GMG18913	GMG19913	R3.0	16.0	16	64	140
GMG18200	GMG19200	R1.0	20.0	20	80	150
GMG18914	GMG19914	R1.5	20.0	20	80	150
GMG18915	GMG19915	R2.0	20.0	20	80	150
GMG18916	GMG19916	R3.0	20.0	20	80	150
GMG18917	GMG19917	R4.0	20.0	20	80	150
GMG18918	GMG19918	R5.0	20.0	20	80	150

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good

ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend											○	○	○	○	○	○	○					

HSS

CBN
END MILLSi-Xmill
END MILLSi-SMART
MODULAR
END MILLSX5070
END MILLS4G MILL
END MILLSX-POWER
PRO
END MILLSTitaNox-
POWER
END MILLSJET-POWER
END MILLSV7 PLUS
END MILLSALU-POWER
HPC
END MILLSALU-
POWER
END MILLSD-POWER
GRAPHITE
END MILLSD-POWER
CFRP
END MILLS

ROUTERS

CRX S
END MILLSK-2
END MILLSONLY ONE
COATED PM60
END MILLSTANK-
POWER
END MILLSGENERAL
HSS
END MILLSMILLING
CUTTERSTECHNICAL
DATA



PLAIN SHANK

GMG18 SERIES

FLAT SHANK

GMG19 SERIES

CARBIDE, 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS EXTRA LANG

CARBURE, 6 DENTS, SÉRIE EXTRA-LONGUE, RAYONNÉE

MD, 6 TAGLIENTI SERIE EXTRA LUNGA TORICA

- ▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling

▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40
- ▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.

▶Ezellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

CARBIDE

6

45°

PLAIN

FLAT

P.460

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT		D1	D2	L1	L2
GMG18250	GMG19250	R1.0	25.0	25	100	170
GMG18919	GMG19919	R1.5	25.0	25	100	170
GMG18920	GMG19920	R2.0	25.0	25	100	170
GMG18921	GMG19921	R3.0	25.0	25	100	170
GMG18922	GMG19922	R4.0	25.0	25	100	170
GMG18923	GMG19923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good																								
ISO	P											M			K									
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎				
ISO	N										S											H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc											15	30	25	38	34			55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
Recommend											○	○	○	○	○	○	○							

GMG16
GMG17

GMG18
GMG19

GMG12
GMG13


GMG14
GMG15

6 FLUTE - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5	Low alloy steel	0.05D	2.0D	Vc	203	203	203	203	203	203	203
					fz	0.05	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10769	8077	6462	5385	4039	3231	2585
					FEED	3231	4119	4110	4135	3610	3237	2698
	6-7	Low alloy steel	0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9	Low alloy steel	0.05D	2.0D	Vc	203	203	203	203	203	203	203
					fz	0.05	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10769	8077	6462	5385	4039	3231	2585
					FEED	3231	4119	4110	4135	3610	3237	2698
M	10-11.1	High alloyed steel, and tool steel	0.05D	2.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
	12-13	Stainless steel	0.05D	2.0D	Vc	213	213	213	213	213	213	213
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11300	8475	6780	5650	4238	3390	2712
					FEED	3322	4271	4231	4238	3712	3295	2734
	14.1	Stainless steel	0.05D	2.0D	Vc	147	147	147	147	147	147	147
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7799	5849	4679	3899	2924	2340	1872
					FEED	1918	2492	2471	2457	2158	1923	1606
	14.2	Stainless steel	0.05D	2.0D	Vc	134	134	134	134	134	134	134
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7109	5332	4265	3554	2666	2133	1706
					FEED	1749	2271	2252	2239	1967	1753	1454
S	31-35	Heat Resistant Super Alloys	0.05D	2.0D	Vc	33	33	33	33	33	33	33
					fz	0.033	0.055	0.07	0.082	0.097	0.112	0.115
					RPM	1751	1313	1050	875	657	525	420
					FEED	347	433	441	431	382	353	290
	36-37	Titanium Alloys	0.05D	2.0D	Vc	116	116	116	116	116	116	116
					fz	0.033	0.055	0.07	0.083	0.097	0.113	0.117
					RPM	6154	4615	3692	3077	2308	1846	1477
					FEED	1218	1523	1551	1532	1343	1252	1037

(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied with L.O.C x 90%





MILLING TOOLS

SOLID CARBIDE

V7 PLUS END MILLS

High performance carbide end mills
for Steels, Cast Iron and Stainless Steels



Please visit
globalyg1.com/mat
for material search

◎: Excellent ○: Good

Recommended cutting conditions : P 458

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc			
P	1	Non-alloy steel	About 0.15% C	Annealed	125		⊙	⊙	⊙
	2		About 0.45% C	Annealed	190	13	⊙	⊙	⊙
	3		About 0.45% C	Quenched & Tempered	250	25	⊙	⊙	⊙
	4		About 0.75% C	Annealed	270	28	⊙	⊙	⊙
	5		About 0.75% C	Quenched & Tempered	300	32	⊙	⊙	⊙
	6	Low alloy steel		Annealed	180	10	⊙	⊙	⊙
	7			Quenched & Tempered	275	29	⊙	⊙	⊙
	8			Quenched & Tempered	300	32	⊙	⊙	⊙
	9			Quenched & Tempered	350	38	⊙	⊙	⊙
	10	High alloyed steel, and tool steel		Annealed	200	15	⊙	⊙	⊙
	11			Quenched & Tempered	325	35	⊙	⊙	⊙
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	⊙	⊙	⊙
	13		Martensitic	Quenched & Tempered	240	23	⊙	⊙	⊙
	14		Austenitic		180	10	⊙	⊙	⊙
K	15	Grey cast iron	Pearlitic / ferritic		180	10	⊙	⊙	⊙
	16		Pearlitic (Martensitic)		260	26	⊙	⊙	⊙
	17	Nodular cast iron	Ferritic		160	3	⊙	⊙	⊙
	18		Pearlitic		250	25	⊙	⊙	⊙
	19	Malleable cast iron	Ferritic		130		⊙	⊙	⊙
	20		Pearlitic		230	21	⊙	⊙	⊙
N	21	Aluminum-wrought alloy	Not Curable		60				
	22		Curable Hardened		100				
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75				
	24		≤ 12% Si, Curable Hardened		90				
	25		> 12% Si, Not Curable		130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110				
	27		CuZn, CuSnZn (Brass)		90				
	28		CuSn, lead-free copper and electrolytic copper		100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	○	○	○
	32			Cured	280	30	○	○	○
	33			Annealed	250	25	○	○	○
	34		Ni or Co Based	Cured	350	38	○	○	○
	35			Cast	320	34	○	○	○
	36	Titanium Alloys	Pure Titanium		400 Rm		○	○	○
	37		Alpha + Beta Alloys	Hardened	1050 Rm		○	○	○
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Chilled Cast Iron		Cast	400	42			
	41	Hardened Cast Iron		Hardened	550	55			

GMF62 GMF63	GMF52 GMF53	GMF56 GMF57	GMF60 GMF61	GMG16 GMG17	GMG18 GMG19	GMG12 GMG13	GMG14 GMG15	EMB72 EMB73
4	4	4	4	6	6	6	6	5
35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	45°	45°	45°	45°	41°~45°
CORNER RADIUS	SQUARE	SQUARE	SQUARE	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE
D3.0	D3.0	D3.0	D3.0	D6.0	D6.0	D6.0	D6.0	D6.0
D20.0	D20.0	D25.0	D20.0	D25.0	D25.0	D25.0	D25.0	D25.0
445	448	449	450	452	453	455	456	457
LONG LENGTH with NECK	SHORT LENGTH	LONG LENGTH	LONG LENGTH with NECK	LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	AlTiN
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								